


SLAMMER


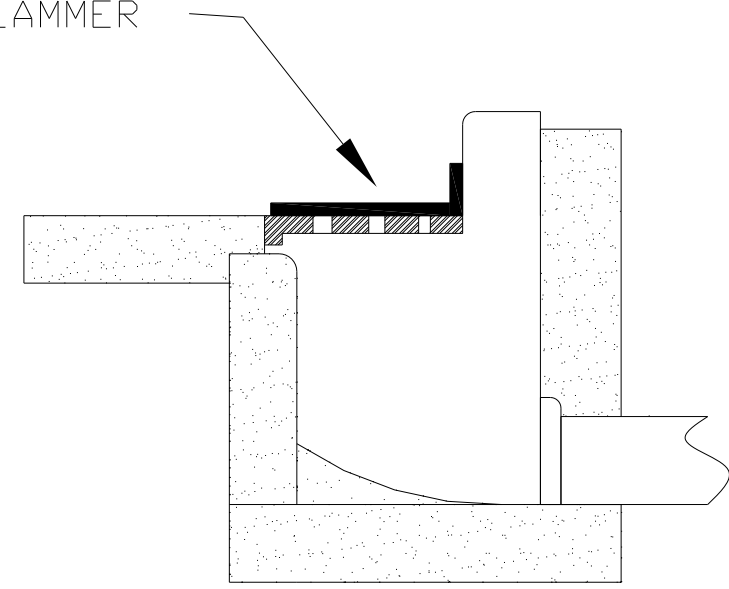


THE SLAMMER

US PATENT # 5,954,952

INSTALLATION:

1. CLEAN AND DRY SURFACE OF GRATE.
2. APPLY A $\frac{1}{4}$ " BEAD OF CAULK TO TOP OF GRATE
3. PRESS "SLAMMER" IN TO PLACE MAKING SURE "SLAMMER" COMPLETELY COVERS ALL GRATE OPENINGS.
4. MAINTENANCE: CLEAN SURFACE AFTER RAIN EVENTS WITH BROOM OR FLAT POINT SHOVEL.

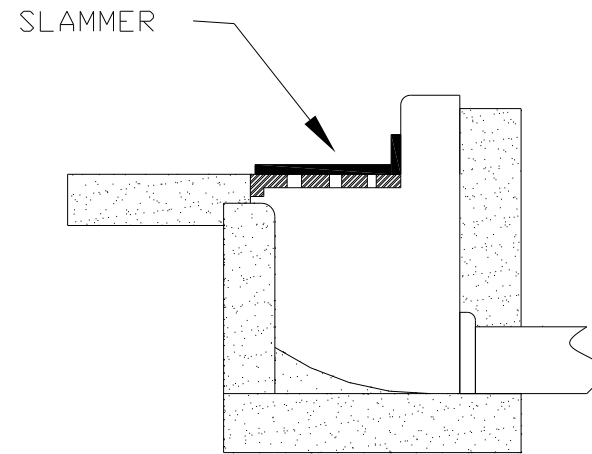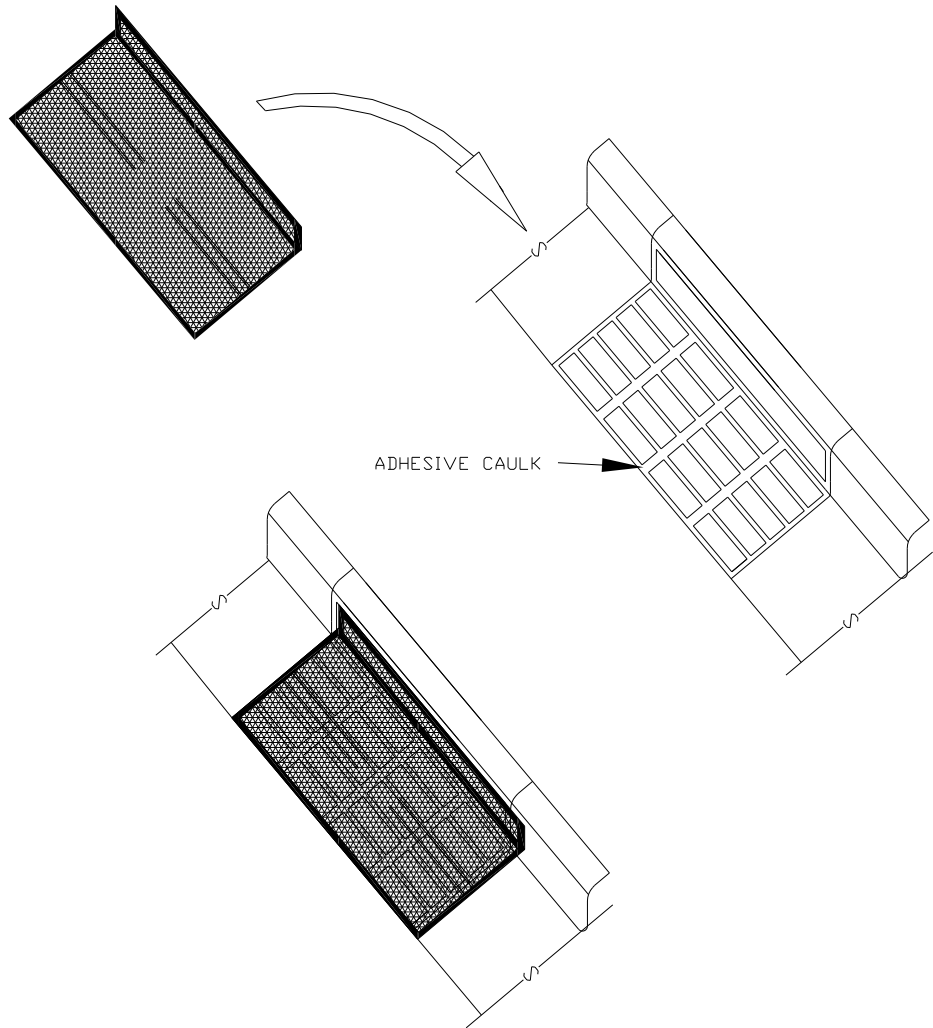

EROSION CONTROL MATERIALS

ENVIROSCAPE

ECM, LTD.

CURB AND GUTTER INLET
PROTECTION

PHONE 419-594-3210
TOLL FREE 888-550-1999
www.strawblanket.com

